

## Chili2D USB Dongle Datasheet

Rev. 0.7, October 2020

### GENERAL DESCRIPTION

The Chili2D module is a fully-featured Thread-certified wireless USB dongle solution for IEEE 802.15.4 communications in the 2.4GHz band. It pairs the Cascoda CA-8211 SMARTRange™ transceiver and a Cortex®-M23 TrustZone® microcontroller.

With industry leading power consumption and sensitivity performance, it delivers unparalleled range without external amplifier components, thus providing whole-house connectivity in any market on the planet.

### FEATURES

- SMARTRange™ CA-8211 IEEE 802.15.4 modem
  - Thread-certified component for every role
  - Industry-leading receive sensitivity of -105dBm
  - Programmable transmit power of -3dBm to +9dBm
  - Industry-leading link budget of 114dB
  - Integrated MAC low-power co-processor
- NuMicro® M2351 TrustZone® MCU
  - Arm® Cortex®-M23 Architecture
  - Highly robust security for IoT applications
  - 512 KB dual-bank application ROM (APROM) for Over-The-Air (OTA) upgrade
  - 96 KB on-chip SRAM
  - Communication interfaces (UART, I2C, SPI, USB)
  - Analog Interfaces (ADC, DAC, Comp)
  - Smart Card (ISO 7816) Interface
- World-class energy consumption
  - World's best receiver efficiency  
14mA (42mW) at -105dBm sensitivity (0.0316nW)  
Figure of Merit (FoM)  $0.75 \text{ (mW} \cdot \text{nW)}^{-1}$
  - 19mA at +9dBm transmit power
  - 3µA sleep mode
- Industrial temperature range: -40°C to +85°C
- Wide supply voltage range: 2.1V to 3.6V
- Chip antenna and all other RF components integrated on module
- 16 MHz crystal for system clock and 32.768 kHz crystal for low-power RTC functionality
- Micro-B USB Interface for power supply and USB-HID communications
- Battery charger for Li-Po battery (3.7V), charging when plugged into USB
- Module size: 27.00 x 21.05 mm

### DEVELOPMENT TOOLS

- Certified Thread stack based on OpenThread
- Optimised interface for the M2351 MCU and the CA8211 hardware MAC
- Module can be detached node running the network stack and application or coprocessor for hosts running Linux within a Thread mesh network
- Cascoda SDK, making full use of CMake as a build system
- Code available open-source on GitHub

### BENEFITS

**Equipment cost:** Increased range removes the need for external power amplifiers, thereby reducing component BOM.

**Installation cost:** Greater datalink reliability lessens the need for skilled installers, and the consumer can self-install.

**Maintenance cost:** Lower power consumption means that batteries last longer, thereby minimising maintenance cost.

**Development time:** Use of pre-certified module minimises product development time.

### APPLICATIONS

- Home and building automation
- Consumer electronics
- Lighting systems
- Heating, ventilation & air-conditioning systems (HVAC)
- Smart grid (AMI/AMR)
- Asset tracking (active RFID)
- Industrial control and monitoring
- Assisted living & telecare



## Table of Contents

1	<a href="#">Overview</a>	3
2	<a href="#">Hardware Description</a>	5
2.1	<a href="#">Module Pin Configuration</a>	5
2.2	<a href="#">Pin Descriptions</a>	6
2.3	<a href="#">Multi-Function Pin (MFP) Mapping</a>	7
2.4	<a href="#">JTAG/SWD ICE Connector for Programming and Debug</a>	7
2.5	<a href="#">Unique Device ID</a>	7
2.6	<a href="#">Power Supply</a>	7
2.7	<a href="#">RF Circuitry</a>	8
3	<a href="#">Electrical Specification</a>	9
3.1	<a href="#">Absolute Maximum Ratings</a>	9
3.2	<a href="#">Environmental Conditions</a>	9
3.3	<a href="#">Recommended Operating Conditions</a>	9
3.4	<a href="#">Digital Pin Characteristics</a>	9
3.5	<a href="#">Supply Currents</a>	9
3.6	<a href="#">General RF Characteristics</a>	10
3.7	<a href="#">Receiver RF Characteristics</a>	10
3.8	<a href="#">Transmitter RF Characteristics</a>	10
4	<a href="#">Software Support</a>	11
5	<a href="#">Regulatory Approvals</a>	12
5.1	<a href="#">Approved Antenna</a>	12
5.2	<a href="#">US (FCC)</a>	12
5.3	<a href="#">Canada (IC)</a>	13
5.4	<a href="#">Europe (CE)</a>	13
6	<a href="#">References</a>	14
7	<a href="#">Revision History</a>	14

## 1 Overview

The Chili2D module is a highly-integrated USB dongle module for developing Thread® / IEEE 802.15.4 low-power wireless personal area network (WPAN) applications. It combines the Nuvoton M2351 Cortex®-M23 TrustZone® microcontroller with the Cascoda CA-8211 Thread® certified 2.4 GHz IEEE 802.15.4 transceiver modem. The main features of the Chili2D module are:

- Nuvoton M2351 Arm® Cortex®-M23 TrustZone® MCU
  - Arm® TrustZone® technology
  - 512k bytes of Flash Application ROM (APROM) memory, dual bank for Over-The-Air (OTA) upgrade
  - 96k bytes of SRAM
  - Up to 64MHz core frequency
- Cascoda SMARTRange™ CA-8211 IEEE 802.15.4 2.4 GHz transceiver modem
  - Thread® certified component for every role
  - Industry-leading link budget of 114 dB
  - -105 dBm receiver sensitivity
  - Up to 9dBm transmit power
  - 19mA transmit current consumption at 9dBm
  - 14mA receive current consumption
  - 200nA low-power mode
- Module sleep current as low as 3uA
- 16MHz crystal oscillator supplying the system clock for both radio and MCU
- 32.768 kHz crystal oscillator for low-power RTC functionality
- Pin access via edge pads to
  - Up to 14 digital GPIOs with mappable Multi-Function Pin (MFP) functionality
  - Communication interfaces (UART, I2C, SPI, USB)
  - Analog Interfaces (ADC, comparator)
- SMD chip antenna
- Micro-B USB connector for power supply and USB-HID communications
- Battery charger for Lithium-polymer battery (3.7V), charging when plugged into USB
- Automatic power supply switching between USB supply and battery supported. MCU ADC input (channel 1) connected to battery voltage (BATT) for battery alarm.
- USB supply connected flag input to MCU for interrupt

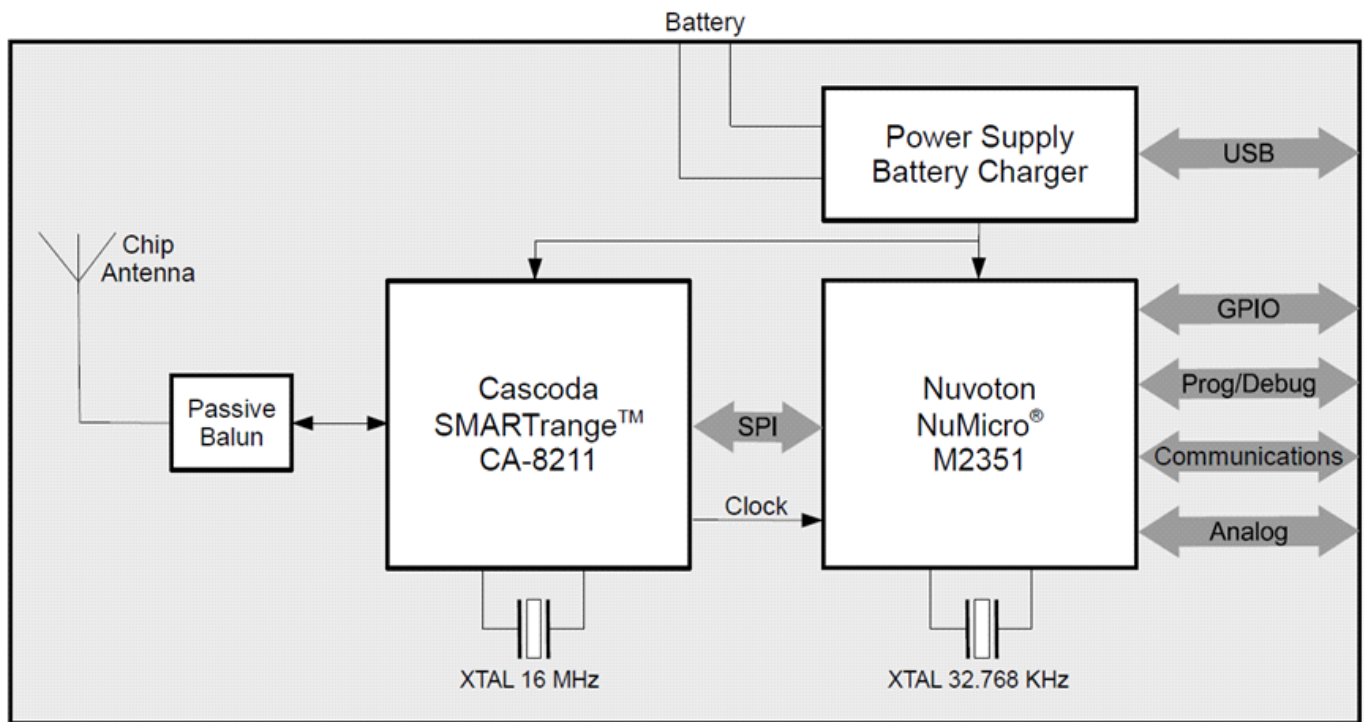


Figure 1.1: Chili2D Block Diagram

## 2 Hardware Description

### 2.1 Module Pin Configuration

The following figure shows the front view of the Chili2D module. The edge pads (Pin1 to Pin42) for solder-down are on 1.27mm pitch.

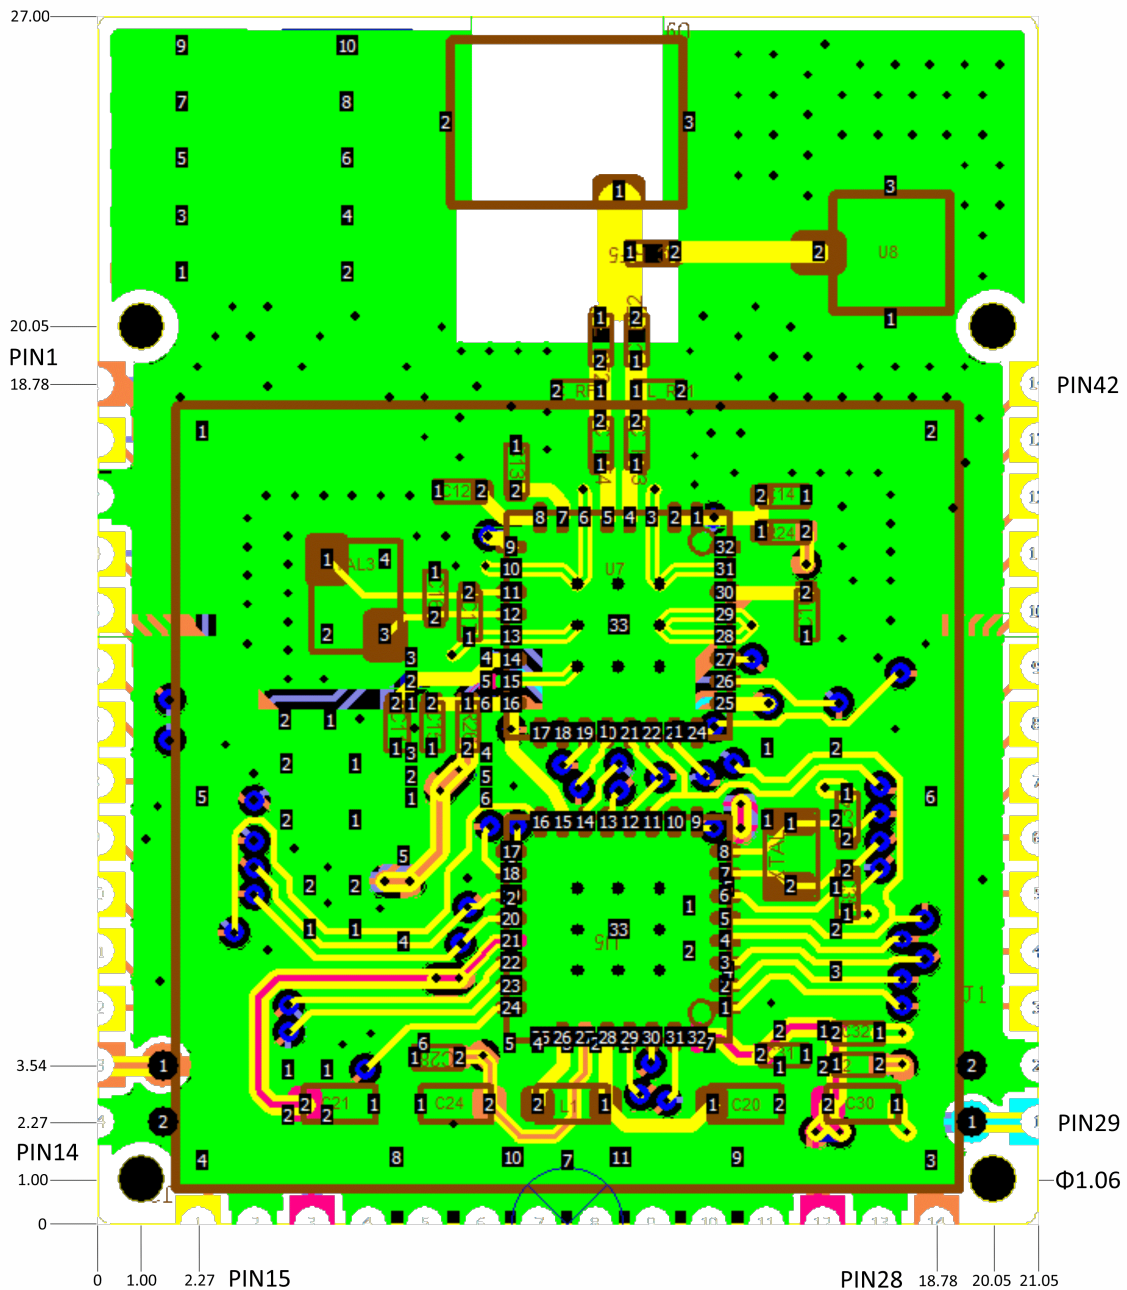


Figure 2.1: Chili2D Front View (Unit:mm)

## 2.2 Pin Descriptions

Pin	Name	Type	M2351 Port	Description
1	VDD33	Supply	-	3.3V Power Supply Output <sup>2)</sup>
2	TMS	GPIO	PF.0	ICE/JLINK Data
3	GND	Ground	-	Module Ground
4	TCK	GPIO	PF.1	ICE/JLINK Clock
5	-	GPIO	PB.12	NC <sup>1)</sup>
6	-	GPIO	PB.13	NC <sup>1)</sup>
7	-	GPIO	PB.14	NC <sup>1)</sup>
8	-	GPIO	PC.1	NC <sup>1)</sup>
9	-	GPIO	PC.0	NC <sup>1)</sup>
10	TRSTX <sup>4)</sup>	Digital In	-	System Reset and ICE/JLINK Reset (active low)
11	-	GPIO	PA.13	NC <sup>1)</sup>
12	-	GPIO	PA.14	NC <sup>1)</sup>
13	VDD33	Supply	-	3.3V Power Supply Output <sup>2)</sup>
14	GND	Ground	-	Module Ground
15	PA.15	GPIO	PA.15	General Purpose Digital I/O
16	GND	Ground	-	Module Ground
17	-	GPIO	PA.12	NC <sup>1)</sup>
18	GND	Ground	-	Module Ground
19	GND	Ground	-	Module Ground
20	GND	Ground	-	Module Ground
21	GND	Ground	-	Module Ground
22	GND	Ground	-	Module Ground
23	GND	Ground	-	Module Ground
24	GND	Ground	-	Module Ground
25	GND	Ground	-	Module Ground
26	AVDD33	Supply	-	Filtered 3.3V Supply <sup>3)</sup>
27	GND	Ground	-	Module Ground
28	VDD33	Supply	-	3.3V Power Supply Output <sup>2)</sup>
29	BATT	Supply	-	Positive Battery Terminal <sup>5)</sup>
30	GND	Ground	-	Module Ground
31	PB.5	GPIO	PB.5	General Purpose Digital I/O
32	PB.4	GPIO	PB.4	General Purpose Digital I/O
33	PB.3	GPIO	PB.3	General Purpose Digital I/O
34	PB.2	GPIO	PB.2	General Purpose Digital I/O
35	-	GPIO	PB.1	NC <sup>1)</sup>
36	-	GPIO	PB.0	NC <sup>1)</sup>
37	-	GPIO	PF.5	NC <sup>1)</sup>
38	-	GPIO	PF.4	NC <sup>1)</sup>
39	-	GPIO	PA.3	NC <sup>1)</sup>
40	-	GPIO	PA.0	NC <sup>1)</sup>
41	-	GPIO	PA.2	NC <sup>1)</sup>
42	-	GPIO	PA.1	NC <sup>1)</sup>

**Table 1: Chili2D Pin Descriptions**

**Notes:**

- 1) NC: Do not connect, as pin is internally connected on module.
- 2) VDD33 is a 3.3V supply output generated by the module for supplying peripherals.
- 3) AVDD33 is a filtered supply output generated by the module for supplying noise-sensitive peripherals.
- 4) TRSTX (Pin 10) can be used by an external host to reset the Chili2D module. Leave unconnected if not used.
- 5) For battery connection only. Do not connect to external supply.

## 2.3 Multi-Function Pin (MFP) Mapping

The GPIO pins on the module can be assigned to specific functions including analog interfaces, communications interfaces and digital functionality. The table below summarises the MFP functions for all GPIO pins accessible on the module. For further information refer to the Nuvoton M2351 Technical Reference Manual [4].

Pin	GPIO Port	Default Function	Analog		Communications Interface				Digital		
			ADC	COMP	UART	I2C	SPI	USB	Smart Card	PWM	Timer
2	PF.0	ICE TMS	-	-	UART1 TXD	I2C1 SCL	-	-	-	BPWM1 CH0	-
4	PF.1	ICE TCK	-	-	UART1 RXD	I2C1 SDA	-	-	-	BPWM1 CH1	-
15	PA.15	GPIO PA.15	-	-	-	-	-	OTG ID	-	BPWM1 CH5 <sup>3)</sup>	-
31	PB.5	GPIO PB.5	EADC0 CH5	ACMP1 N	UART5 TXD	I2C0 SCL	SPI1 MISO	-	SC0 CLK	EPWM0 CH0	TM0
32	PB.4	GPIO PB.4	EADC0 CH4	ACMP1 P1	UART5 RXD	I2C0 SDA	SPI1 MOSI	-	SC0 DAT	EPWM0 CH1	TM1
33	PB.3	GPIO PB.3	EADC0 CH3	ACMP0 N	UART1 TXD <sup>1)</sup>	-	SPI1 CLK	-	SC0 RST	EPWM0 CH2	TM2
34	PB.2	GPIO PB.2	EADC0 CH2	ACMP0 P1	UART1 RXD <sup>2)</sup>	-	SPI1 SS	-	SC0 PWR	EPWM0 CH3	TM3

**Table 2: Multi-Function Pin (MFP) Functionality for the Chili2D GPIO Pins**

Notes:

- 1) Also programmable as UART5\_nRTS
- 2) Also programmable as UART5\_nCTS
- 3) Also programmable as EPWM\_SYNC\_IN

## 2.4 JTAG/SWD ICE Connector for Programming and Debug

A footprint is supplied on the bottom side of the module for a 10-pin connector to directly connect a programmer or debugging interface, for example a Segger J-Link Debug Probe.

TRSTX	10	9	GND
NC	8	7	GND
NC	6	5	GND
TCK	4	3	GND
TMS	2	1	VDD33

**Figure 2.2: 10-Pin Header for JTAG/ICE Programming and Debug**

Note that the Pinout in Figure 2.2 shows the module bottom side view and is therefore mirrored compared to the footprint indication on the top left of Figure 2.1.

Note that all JTAG/SWD signals can also be accessed via the edge pads of the module.

## 2.5 Unique Device ID

Each CHILI2 module is programmed with a unique and non-erasable 64-bit device identification code which can be read by software and used for addressing and other identification purposes.


## 2.6 Power Supply

When the USB is connected (plugged-in), the Chili2D module is supplied by the 5V USB VBUS. If a Li-Po battery is connected to the module, it is isolated from the power supply and charged from the USB supply with a 30mA charge current.

When the USB is disconnected, the module is supplied by the Li-Po battery if connected.

The power supply inputs are down-regulated to the internal module supply (nominal 3.3V) by a low-dropout regulator. This regulated supply voltage is available on the module VDD33 pins (pins 1, 13 and 28) and can be used to power external components.

AVDD33 is a filtered version of VDD33 used both on the module and connected to pin 26 as analog power output, so it can be used to supply noise-sensitive off-module peripherals. It should **not** be connected to VDD33.

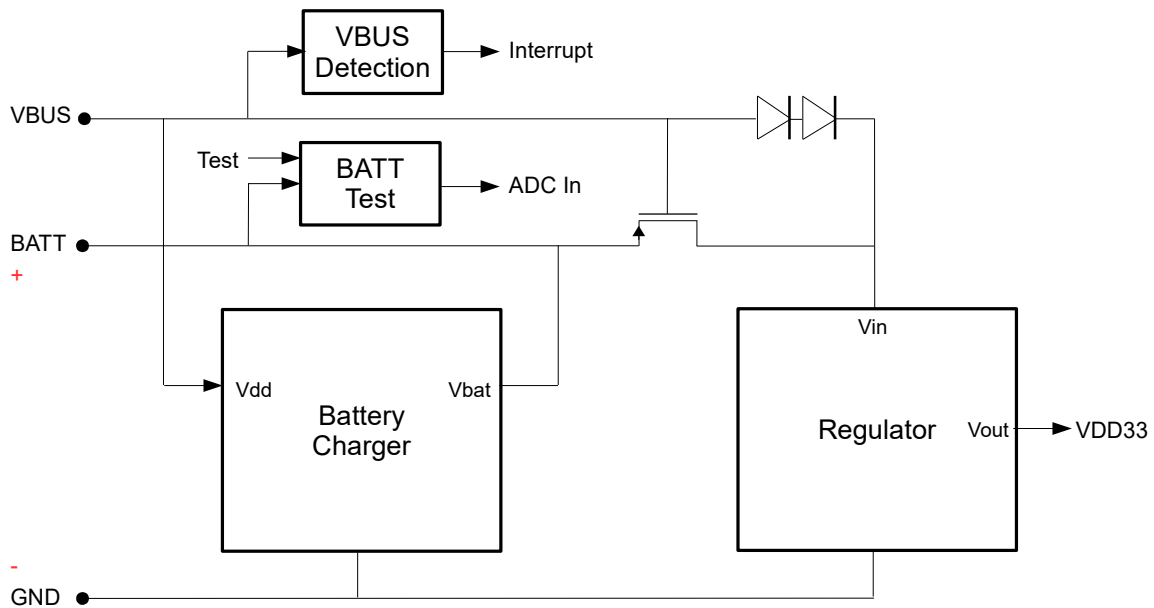

**Figure 2.3: Chili2D Power Supply Circuit**

## 2.7 RF Circuitry

The Chili2D module uses a passive balun design for impedance matching and converting the differential signal of the CA-8211 to a single-ended 50Ω signal for connecting the SMD chip antenna.

When mounting the Chili2D module onto a host board, the module top edge should be aligned with the board edge with the antenna facing out, see Error: Reference source not found. To maximise range, an adequate ground plane must be provided on the host PCB. Correctly positioned, the ground plane on the host PCB will contribute significantly to the antenna performance. The area around and under the antenna, marked KEEP OUT, must be kept clear of conductors or other metal objects on any layer of the host board.



### 3 Electrical Specification

This section specifies important parameters for the Chili2D module. For more detailed information refer to the Nuvoton M2351 Datasheet [3] and the Cascoda CA-8211 Datasheet [2].

#### 3.1 Absolute Maximum Ratings

Parameter	Conditions	Min	Typ	Max	Units
Voltage (on any I/O pin)		-0.3	-	3.9	V
Storage Temperature Range		-65	-	150	°C
Input RF Level		-	-	+10	dBm

**Table 3: Absolute Maximum Ratings**

Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the module. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

#### 3.2 Environmental Conditions

Parameter	Conditions	Min	Typ	Max	Units
ESD	Human-body model, JEDEC STD 22	-	-	2000	V
	Charged-device model, JEDEC STD 22	-	-	500	V
MSL		MSL3			

**Table 4: Environmental Conditions**

#### 3.3 Recommended Operating Conditions

Parameter	Min	Typ	Max	Units
Operating Supply Voltage – USB Supply (VBUS)	4.4	-	5.5	V
Operating Supply Voltage – Battery Voltage	2.2	-	4.4	V
Operating Temperature	-40	-	85	°C
External Load Current on VDD33 and AVDD33 combined	-	-	80	mA

**Table 5: Recommended Operating Conditions**

#### 3.4 Digital Pin Characteristics

Parameter	Conditions	Min	Typ	Max	Units
Input Low Voltage (TTL Input)	VDD33=3.3V	-	-	0.8	V
Input High Voltage (TTL Input)	VDD33=3.3V	2.0	-	-	V
Pull-up Resistor		-	53	-	kΩ
Input Leakage Current @ $V_i=3.3V$		-	-	1	uA
Output Sink Current	VDD33=3.3V, $V_{in}=V_{SS}+0.4V$	3.6	-	19.9	mA
Output Source Current	VDD33=3.3V, $V_{in}=V_{DD33}-0.4V$	-20.6	-	-3.4	mA

**Table 6: Digital Pin Characteristics**

#### 3.5 Supply Currents

Specified for VDD33=3.3V, T=25°C, System Clock=16MHz.

Parameter	Conditions	Min	Typ	Max	Units
Transmit	Tx Power +9 dBm		20		mA
	Tx Power 0 dBm		13		mA
Receive	-105 dBm Sensitivity		15		mA
Processor active, Radio Off			1.5		mA
Sleep Mode			3		uA

**Table 7: Supply Currents**

### 3.6 General RF Characteristics

Parameter	Conditions	Min	Typ	Max	Units
Frequency Range	As specified by [1]	2405		2480	MHz
Number of Channels	As specified by [1]		16		
Data Rate	As specified by [1]		250		kbit/s
TX/RX Turnaround Time	As specified by [1]			192	μs

**Table 8: General RF Characteristics**

### 3.7 Receiver RF Characteristics

Parameter	Conditions	Min	Typ	Max	Units
Receiver Sensitivity	1% PER, PSDU 20 bytes		-105		dBm
Maximum Receiver Input Level	1% PER, PSDU 20 bytes		0		dBm
Symbol Rate Tolerance		-80		80	ppm
Adjacent Channel Rejection Low	-5 MHz		22		dB
Adjacent Channel Rejection High	+5 MHz		35		dB
Alternate Channel Rejection Low	-10 MHz		50		dB
Alternate Channel Rejection High	+10 MHz		50		dB
Spurious Emissions	30 MHz – 1 GHz 1 GHz – 12.75 GHz		-77 -52		dBm dBm
ED Range			83		dB
ED Low Range Limit			-104		dBm
ED High Range Limit			-21		dBm
ED Accuracy within Range			±2		dB
ED LSB Value			0.5		dB

**Table 9: Receiver RF Characteristics**

### 3.8 Transmitter RF Characteristics

Parameter	Conditions	Min	Typ	Max	Units
Output Power		0		9	dBm
Transmitter EVM			5	10	%
Transmitter Harmonics 2 <sup>nd</sup> Harmonic 3 <sup>rd</sup> Harmonic	@9dBm transmit power		-52 -74		dBm
Transmitter Spurious Emissions	30 – ≤1000MHz >1 – 12.75GHz 1.8 – 1.9GHz 5.15 – 5.3GHz		-77 -50 -68 -67		dBm
Absolute PSD Limit	F-Fc >3.5MHz		-43		dBm
Relative PSD Limit	F-Fc >3.5MHz		-35		dB

**Table 10: Transmitter RF Characteristics**

## 4 Software Support

The Cascoda open-source Software Development Kit (SDK) is available on GitHub (<https://github.com/Cascoda/cascoda-sdk>) and contains the API, drivers and interfaces required for developing applications using OpenThread or custom IEEE 802-15-4 based network connectivity.

The Cascoda SDK kit for the Chili2D module and the Nuvoton M2351 MCU contains:

- Optimised and exhaustively tested MAC-level (MCPS/MLME) API and interface drivers
- Hardware-MAC interface and configuration for OpenThread, an open-source implementation of the Thread® IPv6 based wireless mesh networking stack (<https://openthread.io/>)
- Example library for sensor interface drivers
- Low power modes
- Examples for custom IEEE 802.15.4 MAC based applications
- Hardware abstraction functions for module I/O handling, timers etc.

### Build Environment

The Cascoda SDK makes full use of CMake as a build system, to enable advanced configuration and cross-platform development in combination with the ARM® GCC compiler toolchain. Build environments for other embedded compilers (IAR, Keil) are also available.

## 5 Regulatory Approvals

### 5.1 Approved Antenna

This device has been approved with an onboard chip antenna with 1.75 dBi gain for the specific board layout. Any antenna of the same type, with similar in-band and out-of-band characteristics and with the same or less gain, can be used without reassessment. In case of using an antenna of a different type and/or higher gain, reassessment and notification to the particular certification authority is required.

### 5.2 US (FCC)

#### Compliance Statement

The Chili2D module complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

#### Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter module must not be co-located or operating in conjunction with any other antenna or transmitter. The end equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

#### Modular Approval

The Chili2D module meets the requirements for modular transmitter approval as detailed in the FCC public notice DA 00-1407.

It should be noted that:

"While the applicant for a device into which an authorized module is installed is not required to obtain a new authorization for the module, this does not preclude the possibility that some other form of authorization or testing may be required for the device (e.g., a WLAN into which an authorized module is installed must still be authorized as a PC peripheral, subject to the appropriate equipment authorization)."

-- FCC Public Notice DA 00-1407

Caution:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Usage of Channel 26 at full power will result in non-compliance to FCC standards. The Power setting for Channel 26 has been limited to a maximum of +4 dBm by software when using the Cascoda SDK, or, if the Cascoda SDK is not used, use Channel 26 with a reduced power setting of +4 dBm. For further details, please contact Cascoda.

#### Labeling Requirements

The user of this device is responsible for meeting the FCC labeling requirements. A clearly visible label on the exterior enclosure of an incorporating device must list the FCC ID "2ATTO-CHILI2" and the FCC notice above.

The exterior label should use the wording "Contains" or "Contains Transmitter Module". For example:

**Contains FCC ID: 2ATTO-CHILI2**

or

**Contains Transmitter Module FCC ID: 2ATTO-CHILI2**

Any similar wording that expresses the same meaning may be used.

The OEM integrator must not provide information to the end user regarding how to install or remove this RF module or change RF related parameters in the user manual of the end product.

This device complies with Part 15.247 of FCC Rules.

This modular transmitter is only FCC authorized for the specific rule parts listed on the grant, and the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification.

If the grantee markets their product as being Part 15 Subpart B compliant (when it also contains unintentional-radiator digital circuitry), then the grantee shall provide a notice stating that the final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.

The following text shall be made available to the host product end user:

- This device complies with Part 15 of FCC Rules, Operation is Subject to following two conditions:
  1. This device may not cause harmful interference, and
  2. This device must accept any interference received including interference that cause undesired operation.

Other than a product that is so small, or for such use that it is impracticable to label with a font size that is four-points or larger, the text should be placed on the host product.

Also for RF Exposure:

Co-location of this module with other transmitter that operate simultaneously are required to be evaluated using the FCC multi-transmitter procedures.

If the host manufacturer uses the module in a Mobile configuration then the following text is placed in the host product, user guide:

- This device complies with FCC RF radiation exposure limits set forth for an uncontrolled environment and must be installed so that a separation distance of at least 20cm from all persons.

If the RF exposure conditions are different after module integration into a host product (eg: Portable usage, or co-location with another transmitter/ antenna), the this text must be altered as appropriate.

### 5.3 Canada (IC)

#### Compliance Statement

This Device complies with Industry Canada License-exempt RSS standard(s). Operation is subject to the following two conditions:

1. This device may not cause interference, and
2. This device must accept any interference, including interference that may cause undesired operation of the device.

The equipment complies with RF exposure limits set forth for an uncontrolled environment. The antenna(s) used for this transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that permitted for successful communication.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. L'appareil ne doit pas produire de brouillage, et
2. L'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

L'équipement est conforme aux limites d'exposition aux RF établies pour un incontrôlé environnement. L'antenne(s) utilisée pour ce transmetteur ne doit pas être co-localisée ou fonctionner en conjonction avec toute autre antenne ou transmetteur.

Pour réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, le type d'antenne et son gain doivent être choisis de façon que la puissance isotrope rayonnée équivalente (e.i.r.p.) ne dépasse pas celle admise pour une communication réussie.

The end equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

L'équipement final devrait être installé et utilisé avec une distance minimum de 20 centimètres entre le radiateur et votre corps.

Usage of Channel 26 at full power will result in non-compliance to IC standards. The Power setting for Channel 26 has been limited to a maximum of +4 dBm by software when using the Cascoda SDK, or, if the Cascoda SDK is not used, use Channel 26 with a reduced power setting of +4 dBm. For further details, please contact Cascoda.

#### Labeling Requirements

This Module is labelled with its own IC ID. If the IC ID Certification Number is not visible while installed inside another device, then the device should display the label on it referring the enclosed module. In that case, the final end product must be labelled in a visible area with the following:

**“Contains IC: 25180-CHILI2”**

**“HVIN: CHILI2D”** or

**“Contains Transmitter Module IC: 25180-CHILI2”**

**“HVIN: CHILI2D”**

### 5.4 Europe (CE)

This device is conform to the provisions of the requirements of the Radio Equipment Directive (RED, Radio Equipment Directive 2014/53/EU):

- ETSI EN 300 328 V 2.1.1
- ETSI EN 301 489-1 V2.1.1
- ETSI EN 301 489-17 V3.1.1

Note that every application using the Chili2D module will still need to perform the radio EMC tests on the end product according to EN 301 489-17.

The manufacturer must maintain a copy of the Chili2D module documentation and ensure the final product does not exceed the specified power ratings, antenna specifications, and/or installation requirements as specified in the documentation. If any of these specifications are exceeded in the final product, a submission must be made to a notified body for compliance testing to all required standards.

#### Labeling & User Information Requirements

The label on the final products which contain a Chili2D module must follow CE marking requirements.

## 6 References

- [1] IEEE Std 802.15.4™-2006: Wireless Medium Access Control (MAC) and Physical Layer (PHY) Specifications for Low-Rate Wireless Personal Area Networks (LR-WPANs)
- [2] Cascoda IEEE 802.15.4 Transceiver CA-8211 Datasheet, Rev. 1.0, January 2019,  
[https://www.cascoda.com/wp-content/uploads/2019/01/CA-8211\\_datasheet\\_0119.pdf](https://www.cascoda.com/wp-content/uploads/2019/01/CA-8211_datasheet_0119.pdf)
- [3] Nuvoton NuMicro® Family M2351 Series Datasheet, Rev. 1.01, Feb 15, 2019,  
[http://www.nuvoton.com/resource-files/DS\\_M2351\\_Series\\_EN\\_Rev1.01.pdf](http://www.nuvoton.com/resource-files/DS_M2351_Series_EN_Rev1.01.pdf)
- [4] Nuvoton NuMicro® Family M2351 Series Technical Reference Manual, Rev. 1.00, Aug, 2018,  
[http://www.nuvoton.com/resource-files/TRM\\_M2351\\_Series\\_EN\\_Rev1.00.pdf](http://www.nuvoton.com/resource-files/TRM_M2351_Series_EN_Rev1.00.pdf)

## 7 Revision History

Revision	Date	Status	Comments
0.1	20 May 2019		Pre-Release, for Review only.
0.2	30 May 2019		Update Image on the first page
0.3	05 July 2019		Update Image on the first page
0.4	26 July 2019		Update Chili2D Block Diagram
0.5	03 Sep 2019		Preliminary Release
0.6	12 Sep 2019		Added device ID